

# Battery Converter SDI to HDMI



Perfect for connecting SDI camera outputs to HDMI monitors on location, the battery powered, super tough Battery Converter SDI to HDMI features SD/HD auto switching and an SDI loop through for connection to additional equipment. Includes a built-in lithium-ion polymer rechargeable battery as well as an external power supply.

**\$295**

## Connections

### SDI Video Input

Switchable between SD, HD and 3 Gb/s SDI.

### SDI Video Output

1x SD/HD-SDI loop output.

### HDMI


HDMI type A out.

### Multi Rate Support

Auto detection of Level B 3G-SDI, HD or standard definition SDI inputs.

### Software Updates

Via USB 2.0 high speed. (480 Mb/s)

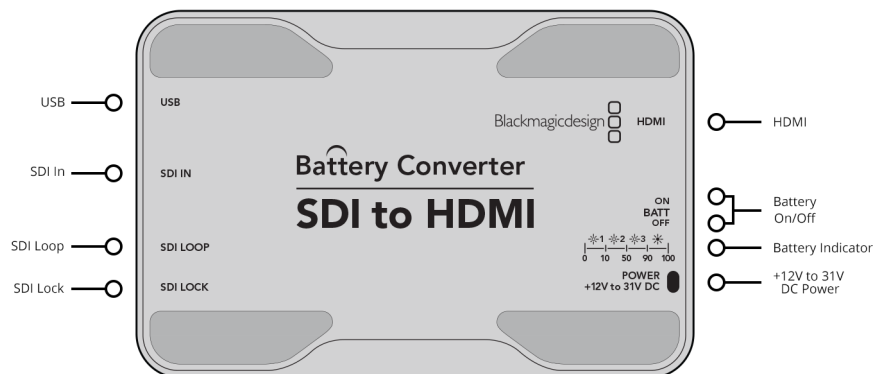

## Standards

### SDI Compliance

SMPTE 292M, SMPTE 259M, SMPTE 296M, ITU-R BT.656 and ITU-R BT.601.

### SDI Video Rates

SDI video connections are switchable between standard definition and high definition.

### SDI Color Precision

4:2:2

### SDI Color Space

YUV

### SDI Auto Switching

Automatically selects between SD-SDI, HD-SDI and 3 Gb/s SDI.

### HDMI Format Support

525/29.97 NTSC, 625/25 PAL, 720p50, 720p59.94, 720p60, 1080i50, 1080i59.94, 1080i60, 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94 and 1080p60.

---

**SDI Video Sampling**

4:2:2

**SDI Audio Sampling**

Television standard sample rate of 48kHz and 24-bit.

**SDI Format Support**

525/29.97 NTSC, 625/25 PAL, 720p50, 720p59.94, 720p60, 1080i50, 1080i59.94, 1080i60, 1080p23.98, 1080PsF23.98, 1080p24, 1080PsF24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60

**HDMI Color Space**

YUV and RGB

**HDMI Color Precision**

4:2:2

---

**Video Lock Indicator**

LED indicates input video signal lock.

---

**Software****Internal Software Upgrade**

Via included updater application.

---

**Operating Systems**

Mac OS X 10.10 Yosemite, Mac OS X 10.11 El Capitan or later.



Windows 8.1 or Windows 10.

---

**Power Requirements****Power Supply**

Integrated Lithium-ion Polymer rechargeable battery. 12V-31V DC port for external battery power or use included 12V AC adapter with international socket adapters for all countries. Cable tie point.

**Battery Information**

Over 2 hours battery life. Battery charge indicator with On/Off switch to preserve battery life.

**Power Consumption**

Typically 2.2 Watts

**Operational Voltage Range**

12 - 31 Vdc

---

---

## Physical Specifications



---

## Environmental Specifications

**Operating Temperature**  
0° to 40° C (32° to 104° F)

**Storage Temperature**  
-20° to 45° C (-4° to 113° F)

**Relative Humidity**  
0% to 90% non-condensing

---

## What's Included

Battery Converter SDI to HDMI  
12V universal power supply with international socket adapters.

---

## Warranty

12 Months Limited Manufacturer's Warranty.

---

All items on this website are copyright Blackmagic Design Pty. Ltd. 2016, all rights reserved.  
All trademarks are property of their respective owners. MSRP excludes sales taxes/duties and shipping costs.

Blackmagic Design Authorized Reseller